
VISION X FUTURE

The Security Technology of the Future

Built-in AI-powered, top-tier security

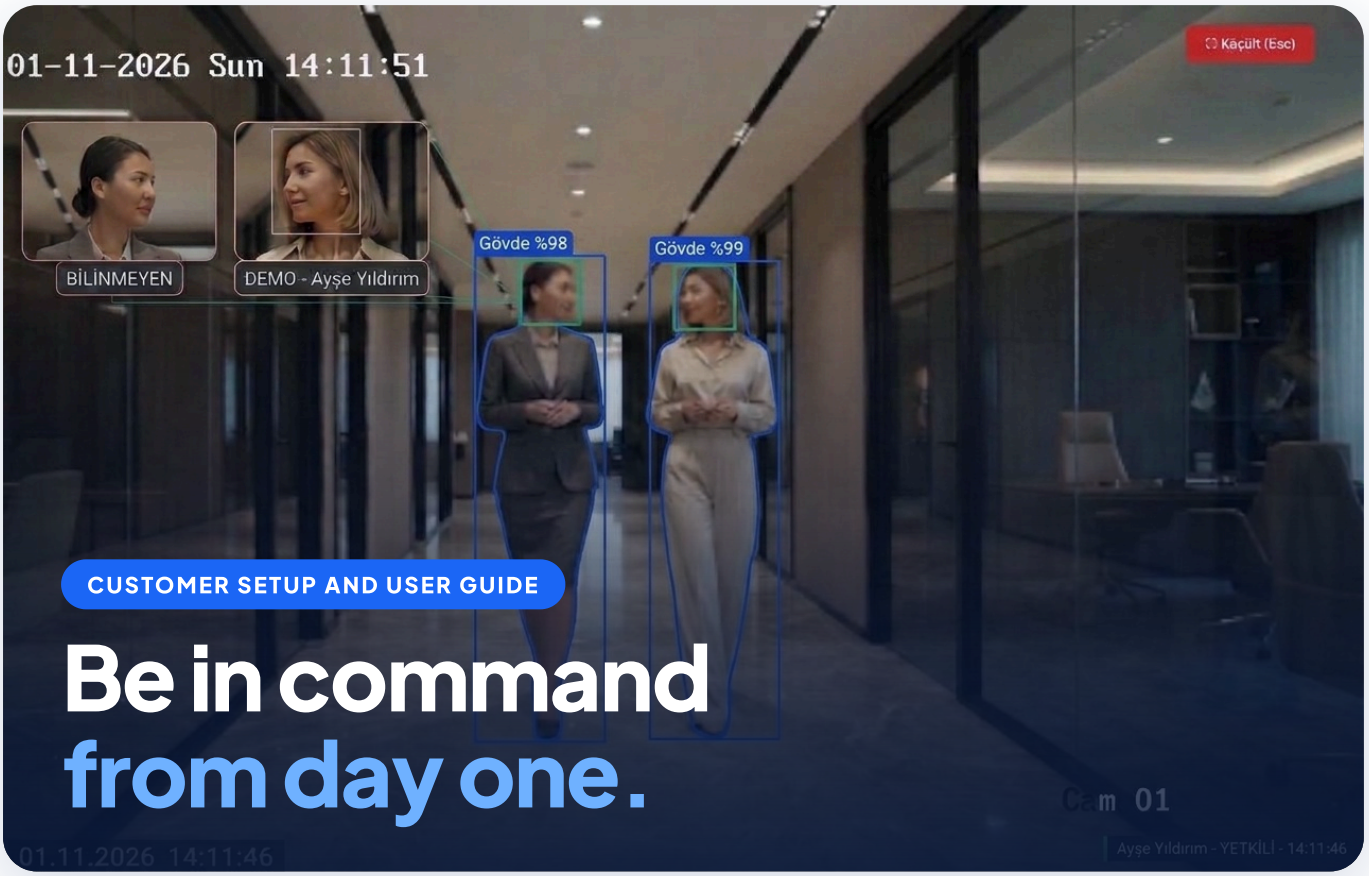

Vision X Future watches your door for you, while you manage everything from a single screen. This guide covers everything you need to know, **from first setup to daily use**, in simple steps.

1
Sign in
Enter safely with your account.

2
Monitor
Doors, cameras and meetings.

3
Search
People and past-face search.

4
Reports
Records, alarms and audit trail.

Who is this guide for?

Administrators, supervisors, operators and auditors who use the system every day. Technical settings and update procedures are in the Administrator Guide.

Screenshots use sample (demo) data and show the Turkish interface.

© 2026 Alpas Group

GETTING STARTED

What is Vision X Future exactly?


A security system that recognises and records the people passing your cameras. It shows who passed the entrance door and whether they are registered, and reports unknown people and suspicious situations to the administrator. It is used in the browser: open the address in Chrome or Edge on the computer and sign in with a username and password.

Who can do what?

ROLE	PERMISSIONS
Administrator	Full authority: users, settings, backup, security, licence
Supervisor	Add/edit people, monitoring, logs, daily work; part of the system settings is closed
Operator	Watches the cameras only
Auditor	Read-only: logs and audit records; cannot change anything

In this guide

- **Setup** — first-run wizard
- **Sign in** — and screen layout
- **Door Entry Control** — and Clear Faces
- **Live Monitoring** — and Meeting Mode
- **People** — and search
- **Logs** — alarms, Telegram
- **Threat alerts** — administrator approval
- **Backup** — and retention
- **If something goes wrong** — support

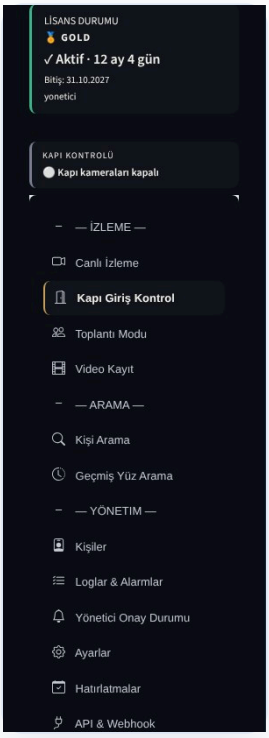

Side menu — some items are hidden depending on your role.

Note

See the Administrator Guide for setup and technical settings. Screenshots in this guide use sample data.

© 2026 Alpas Group

FIRST SETUP

The wizard takes you step by step.

On first launch the setup wizard appears. Our technical team is with you during installation; knowing what is being done still gives you confidence.



Cameras: add a local or IP (RTSP) camera.



Modules: switch on what you need.



Notifications: connect Telegram.



Administrator username, password and master password are set.

1
Welcome and passwords
Set the administrator username and two separate passwords (sign-in and master).

2
Camera
Your camera is added; the connection is tested.

3
Modules
Select the modules you need.

4
Notifications
Connect the Telegram bot (optional).

5
Backup
Pick the daily automatic backup time and backup folder.

6
24/7 operation
Power and start-up settings are checked.

7
Summary
Confirm the setup summary and finish.

Keep your passwords safe


The administrator password and the master password must not be the same. The master password confirms sensitive actions such as deleting logs. Never share your passwords.

© 2026 Alpas Group

SIGN-IN AND SCREEN LAYOUT

Four steps and you are in.

The system opens in the browser; no extra program is needed.

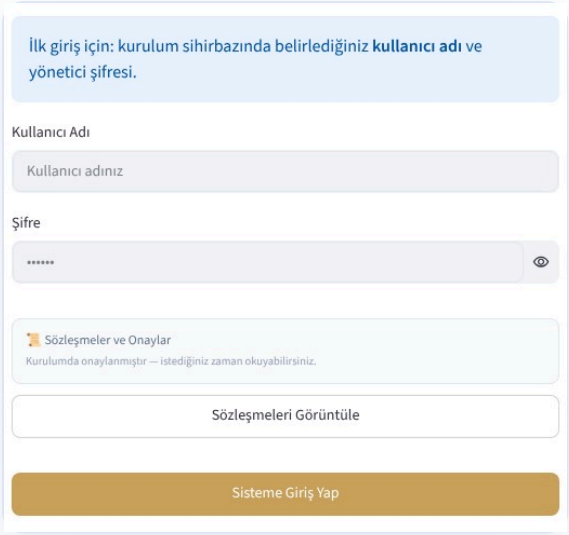

Sign-in screen

1
Open the browser and type the system address (given at installation, usually https://localhost:8501).

2
Type your username and press Enter, then type your password.

3
Press “Sisteme Giriş Yap” (Sign in).

4
If two-step verification (2FA) is on, enter the 6-digit code from the phone app.

Security
If a wrong password is entered several times the account is locked temporarily; contact your administrator. On a shared computer use the Sign out button on the left when you finish.

Side menu

The menu has three groups; some items are hidden depending on your role.

Monitoring
Live Monitoring, Door Entry Control, Meeting Mode, Video Recording

Search
Person Search, Past Face Search

Management
People, Logs & Alarms, Administrator Approval Status, Settings, Reminders

© 2026 Alpas Group

DOOR ENTRY CONTROL

Everyone passing the door is on record.

It records the photo, name and authorisation status of everyone passing the door; this is your main screen.



Pick a camera and press Start.

1
Choose “Single Camera” or “4-Camera” view.

2
Select the camera and press Start; the image and recognised people appear.

3
With “Keep cameras on when switching pages” on, cameras keep running when you switch menus.

4
Press Stop to finish.

Statuses

- **Allowed:** registered and authorised person.
- **Unknown:** person not in the system; the photo goes to the log.
- **Wanted / alarm status:** a notification goes to the administrator (Telegram / e-mail).

If the door opens automatically

- When a person with door permission (by default only those with Authorised status) is clearly recognised, the door opens; “DOOR OPENED — person's name” shows for about 3 seconds.
- For a person without door permission the door does not open; they are still logged.
- The default rule is “open only when alone”: if someone else is beside the authorised person the door stays shut.
- The text appears only when the door really opens; if it does not, tell your administrator. If it says “(simulation)” the physical door does not open.

Clear Faces (optional)

Used to take a clear face photo of everyone passing. On the Door Entry Control page switch on Additional Security Features → Clear Faces.

- For each passage only the sharpest, front-facing frame is kept.
- Records appear under Past Face Search → Clear Faces.
- Retention is 30 days; there is also a GB limit.
- Tip: place the camera where the face is seen head-on at eye level; avoid backlight.


Clear face photos are personal data. An organisation enabling this feature should put up a sign / notice stating that camera monitoring and face imaging take place at the entrance.

© 2026 Alpas Group

LIVE MONITORING · MEETING MODE

All cameras on one screen.

Watch one camera large, watch four together, or count the crowd.

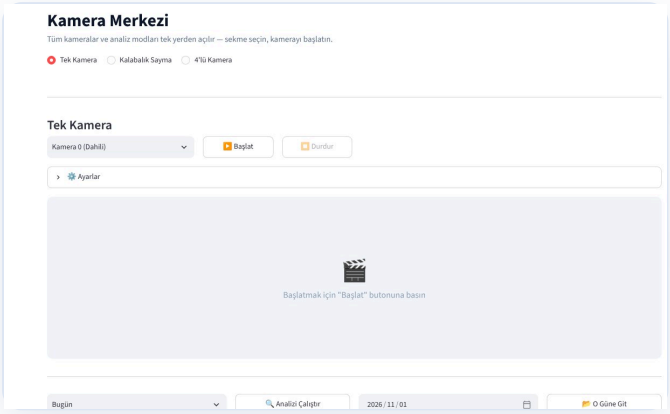

Live Monitoring: Single Camera, Crowd Counting, 4–Camera.

Single Camera

Shows one camera large; face box, person info and automatic log are switched on and off in settings.

4–Camera

Four cameras at once.

Crowd Counting


Shows the number of people in the image.

Analysis

A summary of the chosen period at the bottom of the page.

Meeting Mode

Enter meeting name, location and duration; select the expected attendees. The camera takes attendance automatically.

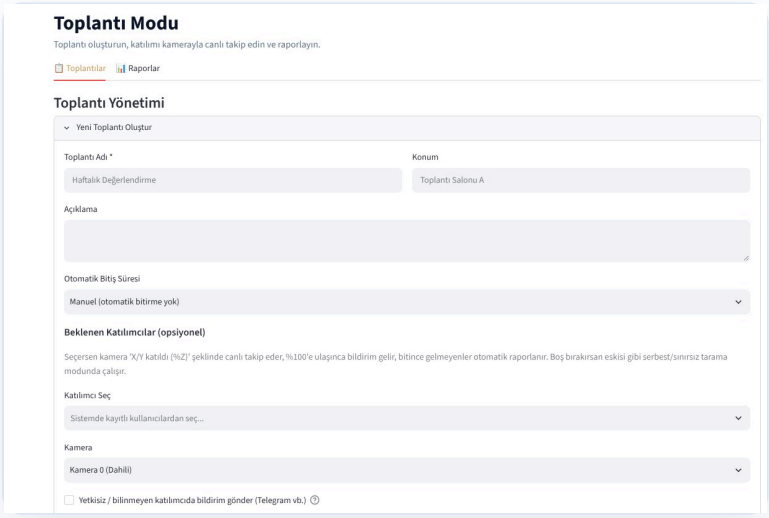

Creating a meeting and attendance.

1
Create a new meeting; select attendees.

2
Press Start Meeting; the camera takes attendance itself.

3
See who joined and when on the Reports tab.


4
For a quick scan without a form use “Start Quick Scan”.

© 2026 Alpas Group

PEOPLE · SEARCH

Manage registered people with ease.

Add, edit, delete and bulk-upload from Excel on one page.

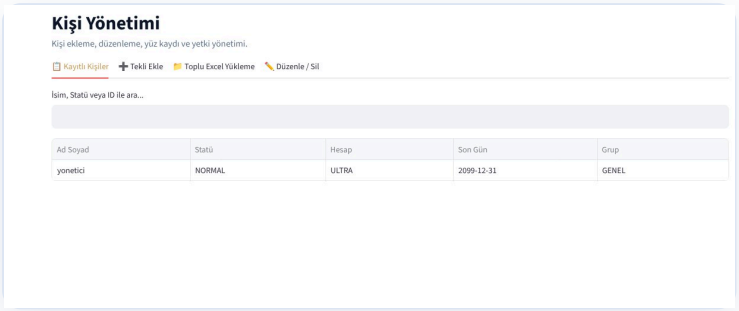

Registered users list.

Add One

Add a person with name, status, photo and end date.

Bulk Excel Upload

Adds many people through Excel.

Edit / Delete


Update details and photo, or delete the person.

What makes a good photo?

Face clear and front-on, no glasses/hat/mask, good lighting, one person. Photo quality directly affects recognition success.

Person Search and Past Face Search

Person Search looks among registered people by name or photo. Past Face Search finds when the photo you upload appeared in past sightings.

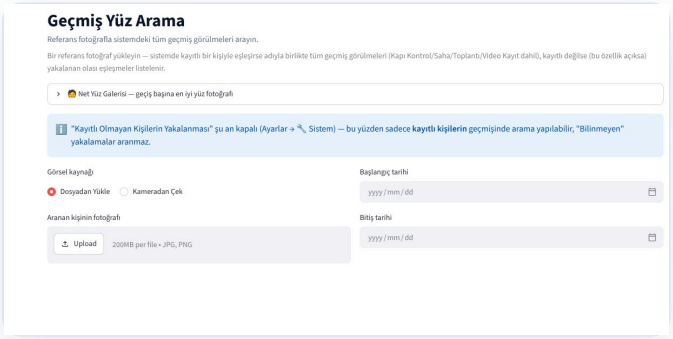

Past Face Search.

Results are possible matches

They do not replace definitive identification; authorised staff should review them.

Clear Faces gallery

If enabled, the Clear Faces gallery is on the same page.

© 2026 Alpas Group

LOGS · ALARMS · TELEGRAM

Who did what, and when?

All passages and actions are on record.



Logs & Alarms tabs.

Access Logs

Who passed, in what status, and when. Day and name filters.

Alarm Logs

Threat and alarm records.

Periodic Reports

Daily / weekly / monthly summary reports.

Secure Delete


Deleting logs; asks for the master password and cannot be undone.

Audit Trail

Who did what, including door openings and responses.

Reminders

Calendar and sticky notes keep tasks from slipping.

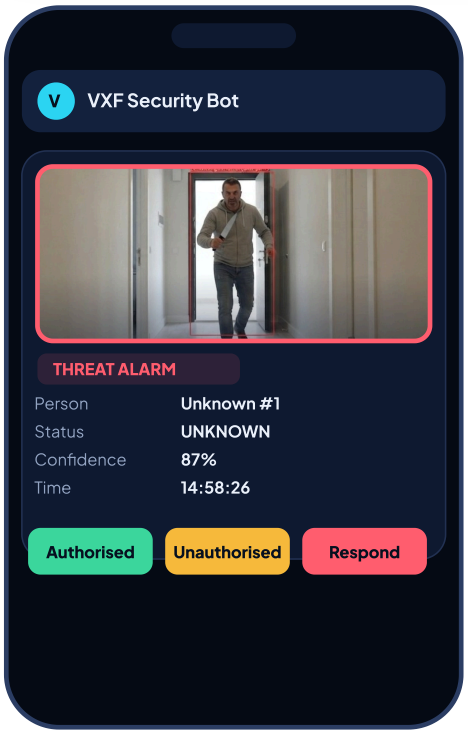

Illustration

The alarm and buttons in Telegram

- The alarm reaches only the administrator's own Telegram account, with a photo.
- **Authorised / Unauthorised:** informational only; they operate no device and record your assessment.
- **Respond:** visible if the administrator enabled it; after choosing an action you are asked “Are you sure?”.
- **Time:** buttons are valid for a set period after the alarm (default 15 minutes).
- **Stop / Undo:** appears after a response, if defined.

Important


The system never starts any response on its own; the decision and second confirmation are the administrator's. Review the image before responding in case of a false alarm.

© 2026 Alpas Group

ADMINISTRATOR APPROVAL · THREAT ALERTS

Every alarm's status is visible.

Follow the status of alarms sent to Telegram from one screen.

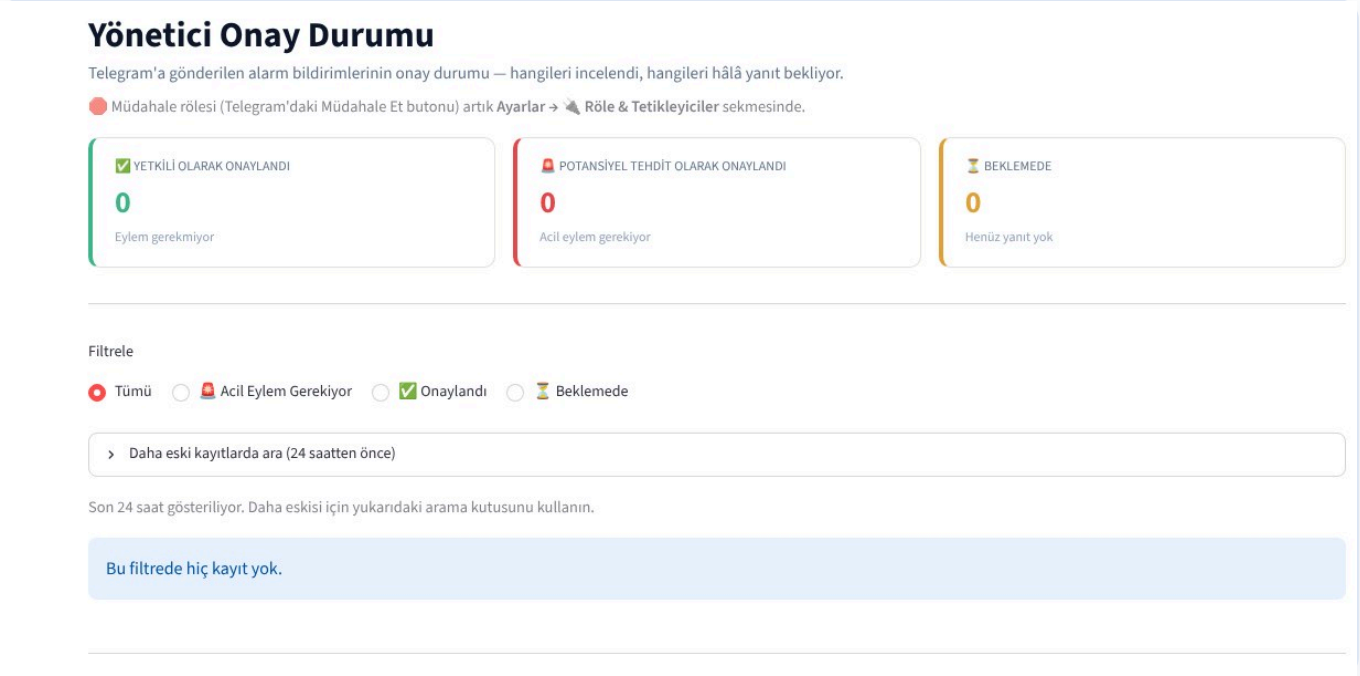

Administrator Approval Status.

- Each card shows the event photo, the person and the administrator's decision (Authorised / Potential threat / Pending).
- The last 24 hours are listed by default; pick a date range for older records.
- The panel in the side menu shows the latest alarms with a small photo; a red warning appears if the Telegram link is lost.

Weapon / Knife (Threat) alerts

If the Threat module is on (off by default; the administrator switches it on under Settings → Modules), an alarm is raised when a weapon- or knife-like object is seen, the frame is saved and the administrator is notified.

Important limitation

This feature is a supporting security layer; it does not replace a security officer and is not guaranteed to catch every threat. It can be wrong depending on light, angle, distance and the object's appearance. When an alarm arrives, assess the image yourself; the decision belongs to the authorised person.

- When an alarm arrives, examine the frame and camera name, direct staff if needed.
- The administrator marks a false alarm as “False alarm” under Settings → Modules → Review Threat Alarms.
- If false alarms keep coming from the same spot, that area can be ignored; a real threat in an ignored area is not detected either.
- The marks are used for better training in later versions; the system does not learn by itself in the field.

© 2026 Alpas Group

BACKUP · RETENTION

Your data is safe.

Face photos and biometric data are stored encrypted; backup is automatic.

Daily automatic backup

The system backs up every night at 03:30. The backup disk must be connected and on.

Monthly copy

Copy the backup to a removable disk once a month.

Encrypted storage

Face photos and biometric data are stored encrypted. Video recordings and name/log texts are not encrypted.

On 24/7

Do not switch the computer off; a UPS should cover power cuts.

How long is data kept?

DATA	RETENTION
Access and alarm logs, photos	When the database budget is full the oldest records are deleted automatically
Video recordings	When the video budget is full the oldest videos are deleted
Clear Faces (if on)	30 days; also the oldest are deleted at the GB limit
Daily backups	A set number, or until the disk is full (at least 3 backups are always kept)

Storage and processing of data are subject to personal-data legislation; retention periods are settled together with your organisation.

© 2026 Alpas Group

IF SOMETHING GOES WRONG

Most problems have a simple fix.

The table below summarises the most common situations.

SYMPTOM	WHAT TO DO
Page does not open	Is the computer on? Is the address right in the browser? Tell your administrator.
No camera image	Stop/Start the camera; check cable and switch lights.
I forgot my password	Request account recovery on the sign-in screen; tell your administrator or the support line.
Says Unknown but the person is registered	Renew the photo (clear, front-on); check the lighting.
No Telegram notifications	Your administrator should send a Test Message under Settings → Telegram.
False weapon/knife alarm	Tell the administrator; the frame is marked “False alarm”.
Door did not open	The person's status may lack door permission, or someone is beside them; the administrator sees the reason in the Audit Trail.
No Respond button / expired	The feature may not be enabled, or the time (default 15 min) has passed; wait for a new alarm.
No records in Clear Faces	Is the switch on, is the camera running? If the face is not front-on and clear the frame is not kept.

Support line

We are with you on anything you get stuck on.

destek@ahiplus.com

WhatsApp · +90 532 424 69 57 · Süleyman ALP

This document is for information only. Features vary by installation and licence scope.

© 2026 Alpas Group